


PATCH CORDS

RJ45 patch cords Cat.5e UTP 100 MHz unshielded, wiring 1:1

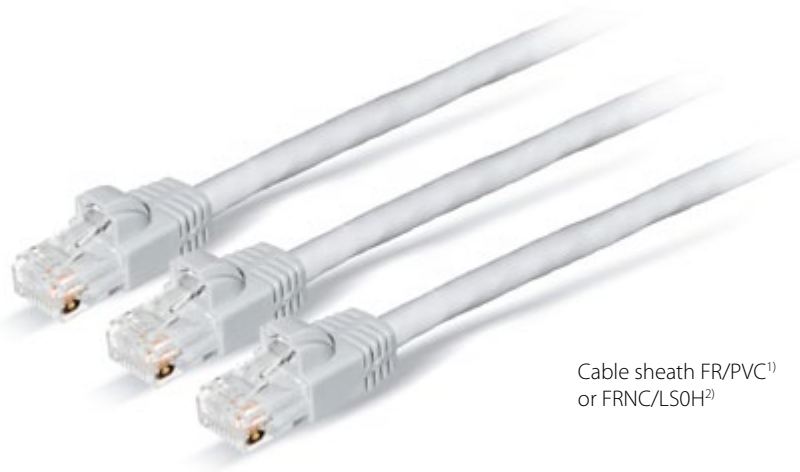

Cable sheath FR/PVC¹⁾
or FRNC/LSOH²⁾

PRODUCT INFORMATION

APPLICATION	Applicable for all applications up to Class D (100 MHz), for example Gigabit Ethernet 1000Base-T, Fast Ethernet 100Base-T, ISDN, and PoE according to IEEE 802.3af.
DESCRIPTION	RJ45 patch cord Cat.5e (up to 100 MHz), unshielded, with a RJ45 plug (Cat.6) and a moulded anti-snag boot on both ends. Unshielded flexible cable U/UTP Cat.5e, 100 MHz, 4P, AWG 24. Cable sheath made of FR/PVC, also available as FRNC/LSOH. RJ45 plugs (8/8) Cat.6 in accordance with IEC 60603-7-2.
PROPERTIES	Flame retardant in accordance with IEC 60332-1, RoHS compliant.
APPLICABLE STANDARDS	IEC 61935-2, TIA/EIA 568-B.2-1 Cat.5e, Commercial Building Telecommunications Cabling Standard, part 2: Balanced Twisted-Pair Cabling Components (as of June 2002).
PACKING UNIT	One patch cord, bundled as a ring in a plastic bag.

Length ³⁾	Article no. RJ45 patch cord U/UTP Cat.5e, wiring 1:1, with grey cable sheath FR/PVC ¹⁾ or FRNC/LSOH ²⁾	
	grey FR/PVC	grey FRNC/LSOH
1.0 m	309001	309301
1.5 m	309002	309302
2.0 m	309003	309303
3.0 m	309005	309305
4.0 m	309006	309306
5.0 m	309007	309307
7.0 m	309009	309309
10.0 m	309011	309310

¹⁾ FR/PVC = Flame Retardant / Polyvinyl chloride

²⁾ FRNC/LSOH = Flame Retardant Non Corrosive / Low Smoke Zero Halogen

³⁾ other lengths on request, minimum order quantity = 100 pieces