


UTP Patch cord RJ45 Cat.6 250 MHz
unscreened, 4P wiring 1:1



Cable sheath FRNC/LSOH

PRODUCT INFORMATION

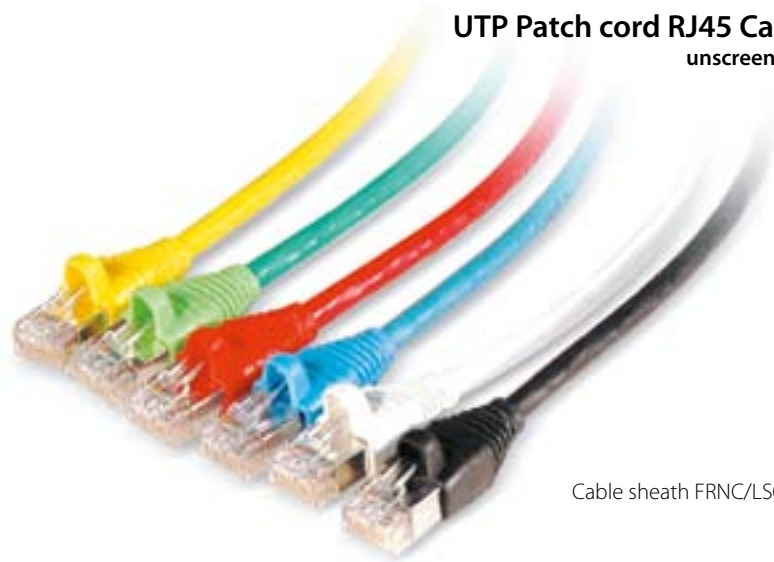




DESCRIPTION

Patch cord RJ45 Cat.6 unscreened, 4P wiring 1:1

CU 602 flex 4P, 250 MHz, with coloured bend limiting boot

The Dätwyler patch cord and connection cable CU 602 flex 4P are terminated on both ends with a RJ45 plug and a moulded bend limiting boot. The CU 602 flex 4P cable is suitable for transmission rates up to 250 MHz. Assembled with shielded RJ45 plug Cat.6 for better performance.

GENERAL CHARACTERISTICS

-  Zero halogen
non corrosive gases
 -  Flame propagation
 -  Smoke density
 -  Power over Ethernet
 -  Cat./Class
- IEC 60754-1/-2, EN 50267-2-1/-2-2
(VDE 0482-267-2-1/-2-2) (acc. to FRNC/LSOH)
IEC 60332-1-2, EN 60332-1-2 (VDE 0482-332-1-2)
IEC 61034-1/-2, EN 61034-1/-2,
(VDE 0482-1034-1/-2) (acc. to FRNC/LSOH)
IEEE 802.3af
better than Cat.6, Class E

Length/Meter	602 flex 4P FRNC/LSOH Cat.6, coloured bend limiting boot						
	grey	green	yellow	red	blue	white	black
0,5	651 553	651 853	651 703	651 803	651 753	651 653	651 603
1,0	651 558	651 858	651 708	651 808	651 758	651 658	651 608
1,5	651 559	651 859	651 709	651 809	651 759	651 659	651 609
2,0	651 560	651 860	651 710	651 810	651 760	651 660	651 610
2,5	651 561	651 861	651 711	651 811	651 761	651 661	651 611
3,0	651 562	651 862	651 712	651 812	651 762	651 662	651 612
4,0	651 564	651 864	651 714	651 814	651 764	651 664	651 614
5,0	651 566	651 868	651 716	651 816	651 766	651 666	651 616
6,0	651 568	651 870	651 718	651 818	651 768	651 668	651 618
7,0	651 570	651 872	651 720	651 820	651 770	651 670	651 620
7,5	651 571	651 874	651 721	651 821	651 771	651 671	651 621
8,0	651 572	651 876	651 722	651 822	651 772	651 672	651 622
10,0	651 576	651 877	651 726	651 826	651 776	651 676	651 626
15,0	651 578	651 878	651 728	651 828	651 778	651 678	651 628
20,0	651 580	651 880	651 730	651 830	651 780	651 680	651 630