



## SHIELDED DATA CABLE

### Data cable S/FTP Cat.7 AWG23

CU 7080 4P / 2x4P F8

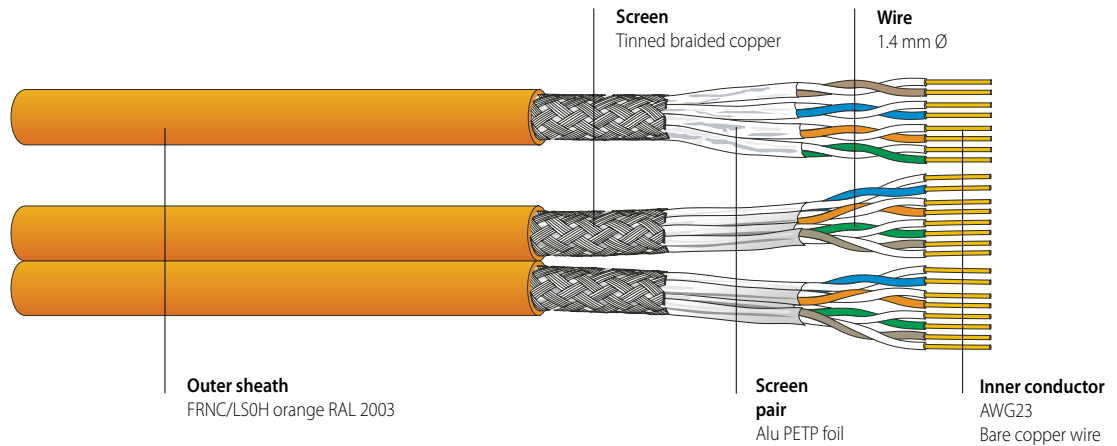

## PRODUCT INFORMATION



### FEATURES

Electrically and mechanically high-quality Cat.7 data cable - exceeds the requirements of ISO/IEC 11801, IEC 61156-5, EN 50173-1 and EN 50288-4-1. Excellent shielding effect due to individually screened pairs and overall copper braid. Compatible with all current connecting hardware in accordance with EN 50173 and ISO/IEC 11801.

### APPLICATIONS

Data cable for structured premises cabling. For the transmission of digital and analogue voice, video and data signals. Suitable for all ICT network applications up to class F applications (600 MHz) in accordance with EN 50173-1 and ISO/IEC 11801 and for the transmission of broadband signals (such as cable TV) in accordance with IEC 15018. Applicable for Power over Ethernet (PoE) / PoE+.

### VERSIONS

Article No.	Dimension n x n x mm (AWG)	Sheath	Sheath Ø mm	Weight kg/km	Cu weight kg/km	Fire load		PU
						kWh/m	MJ/m	
182911	4 x 2 x 0.57 (AWG23)	FRNC/LSOH <sup>1)</sup>	7.4	60	31.1	0.16	0.57	1000 m drum
182912	2 x (4 x 2 x 0.57 (AWG23))	FRNC/LSOH <sup>1)</sup>	7.4 x 15.6	120	62.2	0.32	1.14	500 m drum


<sup>1)</sup> FRNC/LSOH = Flame Retardant Non Corrosive / Low Smoke Zero Halogen

**ELECTRICAL CHARACTERISTICS**

CATEGORY	5e		6	6 <sub>A</sub>	7					
Frequency [MHz]	1	4	10	100	250	500	600	800	862	1000
Attenuation [dB/100m]	1,9	3,7	5,6	17,9	28	41	46	52	54	57
NEXT [dB]	100	100	100	100	100	92	90	84	83	80
PS NEXT [dB]	97	97	97	97	97	89	87	81	80	77
ACR-N [dB]	98	96	94	82	72	58	44	32	29	23
PS-ACR-N [dB]	95	93	91	79	69	55	41	29	26	20
ACR-F [dB]	98	98	98	78	69	56	45	39	37	33
PS-ACR-F [dB]	95	95	95	75	66	53	42	36	34	30
Return loss [dB]	26	30	33	33	28	26	25	23	22	20

These performance data are typical measured values.

Loop resistance at 20° C: 140 Ω/km  
 Mutual capacitance: 42 pF/m  
 Impedance at 100 MHz: 100 Ω ±5 Ω  
 Transfer impedance at 1/10/30 MHz: < 6/6/10 mΩ/m  
 Coupling attenuation (limit curve of critical state - IEC 61156): ≥ 85 dB  
 Near end unbalance att. LCL at 1-600 MHz: > 40 dB  
 Delay Skew: 12 ns/100 m  
 NVP: 81 %

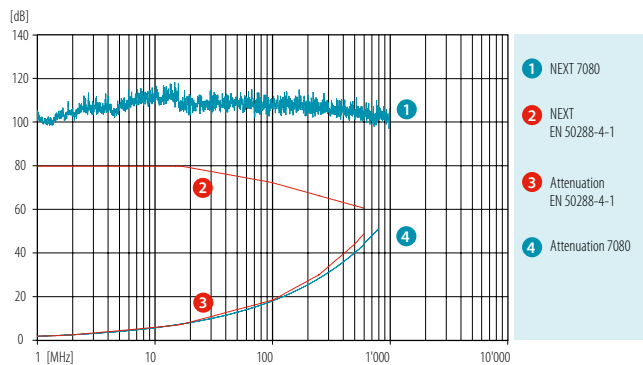

**MECHANICAL CHARACTERISTICS**

Bending radius (flat side)  
 Tensile strength:  
 Crush resistance:  
 Impact:  
 Temperature range

during draw-in:  
 permanently installed:  
 during installation:  
 in operation:

**CU 7080 4P**

≥ 60 mm  
 ≥ 30 mm  
 ≤ 110 N  
 ≥ 1000 N/10 cm  
 ≥ 10 impacts  
 0° C to + 50° C  
 -20° C to + 60° C

**CU 7080 2x4P F8**

≥ 60 mm  
 ≥ 30 mm  
 ≤ 220 N  
 ≥ 1000 N/10 cm  
 ≥ 10 impacts  
 0° C to + 50° C  
 -20° C to + 60° C

**GENERAL CHARACTERISTICS**

Wire colour code

white/blue  
 white/orange  
 white/green  
 white/brown  
 in accordance with IEC 60189 and IEC 60708

Imprint

DATWYLER «cable type» «additional text» «batch number» «meter marks»

- Zero halogen, non corrosive gases
- Flame propagation
- Flame spread
- Smoke density
- Power over Ethernet plus
- EMC
- Cat./Class

IEC 60754-1/-2, EN 50267-2-1/-2-2 (VDE 0482-267-2-1/-2-2)  
 IEC 60332-1-2, EN 60332-1-2 (VDE 0482-332-1-2)  
 IEC 60332-3-24, EN 60332-3-24  
 IEC 61034-1/-2, EN 61034-1/-2 (VDE 0482-1034-1/-2)  
 IEEE 802.3at  
 shielded  
 better than Cat.7 / Class F