



SHIELDED DATA CABLE

Data cable S/FTP Cat.7_A AWG22 CU 7150 4P Multimedia / 2x4P F8

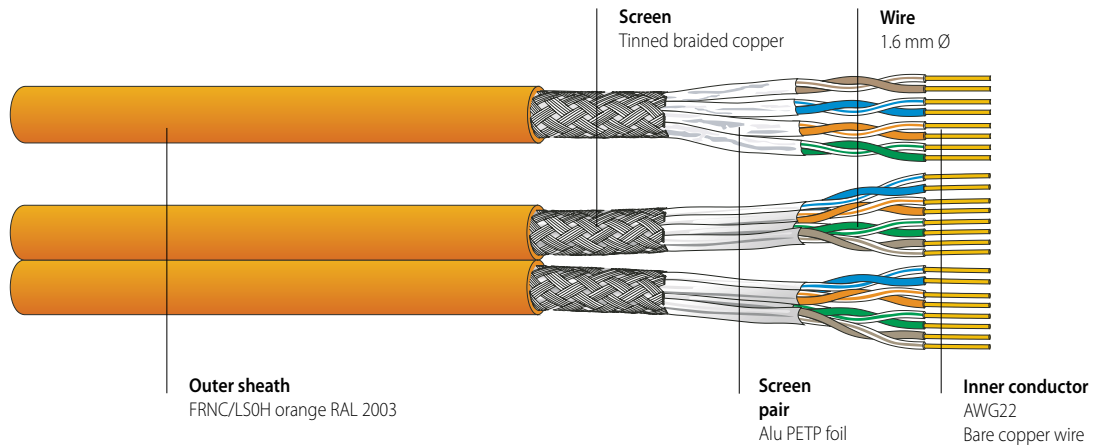

PRODUCT INFORMATION



FEATURES

Electrically and mechanically high-quality Cat.7_A data cable - exceeds the requirements of ISO/IEC 11801, IEC 61156-5, IEC 61156-7, EN 50173-1 and prEN 50288-9-1.
Excellent shielding effect due to individually screened pairs and overall copper braid.
Easy identification of wires thanks to longitudinal colour markings.
Compatible with all current connecting hardware in accordance with EN 50173 and ISO/IEC 11801.

APPLICATIONS

Data cable for structured premises cabling.
For the transmission of digital and analogue voice, video and data signals.
Suitable for all ICT network applications up to class F_A applications (1000 MHz) in accordance with EN 50173-1 and ISO/IEC 11801.
Optimized for the transmission of broadband signals (such as cable TV) in accordance with IEC 15018.
Due to the increased wire section eminently suited for Power over Ethernet (PoE) / PoE+.

VERSIONS

Article No.	Dimension n x n x mm (AWG)	Sheath	Sheath Ø mm	Weight kg/km	Cu weight kg/km	Fire load kWh/m MJ/m	PU
182925	4 x 2 x 0.64 (AWG22)	FRNC/LSOH ¹⁾	7.8	69.2	40.2	0.18 0.65	1000 m drum
182926	2 x (4 x 2 x 0.64 (AWG22))	FRNC/LSOH ¹⁾	7.8 x 16.4	139.2	80.4	0.36 1.30	500 m drum


¹⁾ FRNC/LSOH = Flame Retardant Non Corrosive / Low Smoke Zero Halogen

ELECTRICAL CHARACTERISTICS

CATEGORY	5e		6	6 _A	7	CATV	7 _A	61156-7			
Frequency [MHz]	1	4	10	100	250	500	600	862	1000	1200	1500
Attenuation [dB/100 m]	1.7	3.2	4.9	16.2	26	38	40	49	54	58	68
NEXT [dB]	103	103	103	103	103	98	96	92	90	85	80
PS NEXT [dB]	100	100	100	100	100	95	93	89	87	82	77
ACR-N [dB]	101	100	98	87	77	60	56	43	36	27	12
PS-ACR-N [dB]	98	97	95	84	74	57	53	40	33	24	9
ACR-F [dB]	110	108	106	94	84	71	66	58	55	46	41
PS-ACR-F [dB]	107	105	103	91	81	68	63	55	52	43	38
Return loss [dB]	26	30	33	33	28	26	25	24	23	23	20

These performance data are typical measured values.

Loop resistance at 20° C: 111 Ω/km
 Mutual capacitance: 41 pF/m
 Impedance at 100 MHz: 100 Ω ± 5 Ω
 Transfer impedance at 1/10/30 MHz: < 5/5/8 mΩ/m
 Coupling attenuation (limit curve of critical state - IEC 61156): ≥ 85 dB
 Near end unbalance att. LCL: > 40dB
 Delay skew: 17 ns/100m
 NVP: 80 %

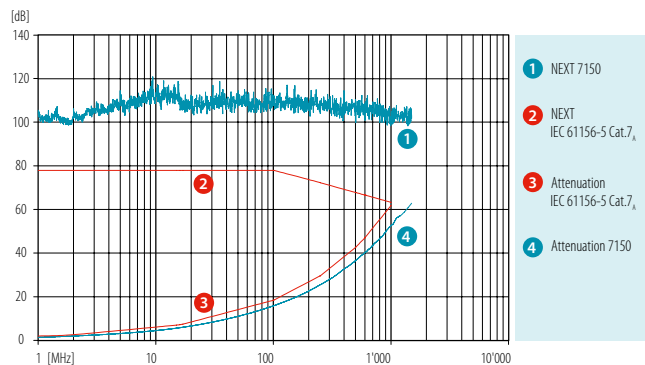

MECHANICAL CHARACTERISTICS

Bending radius (flat side)
 Tensile strength:
 Crush resistance:
 Impact resistance:
 Temperature range

during draw-in:
 permanently installed:
 during installation:
 in operation:

CU 7150 4P
 ≥ 64 mm
 ≥ 32 mm
 ≤ 130 N
 ≥ 1000 N/10 cm
 ≥ 10 impacts
 0° C to + 50° C
 -20° C to + 60° C

CU 7150 2x4P F8
 ≥ 64 mm
 ≥ 32 mm
 ≤ 260 N
 ≥ 1000 N/10 cm
 ≥ 10 impacts
 0° C to + 50° C
 -20° C to + 60° C

GENERAL CHARACTERISTICS

Wire colour code

white-blue/blue
 white-orange/orange
 white-green/green
 white-brown/brown
 (with longitudinal stripes)
 in accordance with IEC 60189 and IEC 60708

Imprint

DATWYLER «cable type» «additional text» «batch number» «meter marks»

- Zero halogen
- non corrosive gases
- Flame propagation
- Flame spread
- Smoke density
- Power over Ethernet plus
- EMC
- Cat./Class

IEC 60754-1/-2, EN 50267-2-1/-2-2 (VDE 0482-267-2-1/-2-2)
 IEC 60332-1-2, EN 60332-1-2 (VDE 0482-332-1-2)
 IEC 60332-3-24, EN 60332-3-24
 IEC 61034-1/-2, EN 61034-1/-2 (VDE 0482-1034-1/-2)
 IEEE 802.3at
 shielded
 better than Cat.7_A / Class F_A